



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION

December 3, 2018

Kevin Kutcel  
Agent  
New Nautical Coatings Inc.  
14805 49th Street North  
Clearwater, FL 33762

Subject: Notification per PRN 98-10 – Add new ABN and minor label revisions  
Product Name: Seahawk Smart Solution Antifouling Coating Black  
EPA Registration Number: 44891-19  
Application Date: August 31, 2018  
Decision Number: 544284

Dear Mr. Kutcel:

The Agency is in receipt of your Application for Pesticide Notification under Pesticide Registration Notice (PRN) 98-10 for the above referenced product. The Antimicrobials Division (AD) has conducted a review of this request for its applicability under PRN 98-10 and finds that the action requested falls within the scope of PRN 98-10.

The label submitted with the application has been stamped “Notification” and will be placed in our records.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

The alternate brand name Sea Hawk Yacht Finishes Premium Quality Smart Solution Antifouling Coating has been added to the product record.

If you have any questions, you may contact Mohammad Alavi at (703) 347-0522 or via email at [Alavi.mohammad@epa.gov](mailto:Alavi.mohammad@epa.gov).

Sincerely,

A handwritten signature in blue ink that reads "E. Miederhoff". The signature is written in a cursive style with a large, stylized initial "E".

Eric Miederhoff  
Product Manager 31  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs

Notes to reviewer are bracketed [ ]  
Statements in parenthesis are optional or alternative text ( )  
[Delete] Strike Through

**HIGHLIGHTED**

[Brand Names]

**SEAHAWK SMART SOLUTION ANTIFOULING COATING BLACK**

[Alternative Brand Names]

**Smart Solution**

**Sea Hawk Premium Quality Smart Solution Antifouling Coating  
Smart Solution Antifouling Coating  
Smart Solution Antifouling Paint**

**Sea Hawk Yacht Finishes Premium Quality Smart Solution Antifouling Coating**

**NOTIFICATION**

44891-19

The applicant has certified that no changes, other than those reported to the Agency have been made to the labeling. The Agency acknowledges this notification by letter dated:

12/03/2018

Active Ingredients:	
(2-(p-chlorophenyl)-3-cyano-4-bromo-5-trifluoromethyl pyrrole) (tralopyril) . . . . .	2.90%
Other Ingredients: . . . . .	97.10%
TOTAL . . . . .	100.00%
*Contains petroleum distillates, xylene, or xylene range aromatic solvents.	


**KEEP OUT OF REACH OF CHILDREN  
DANGER**

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS AND FIRST AID

(LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty of this product, expressed or implied.)

[OPTIONAL MARKETING STATEMENTS:]

- Outdrive Paint
- Metal Free Coating
- Outboard Paint
- Lower Unit Coating
- Environmental Buoy Paint
- Eco Buoy
- Crap Trap Paint
- Yacht Finishes

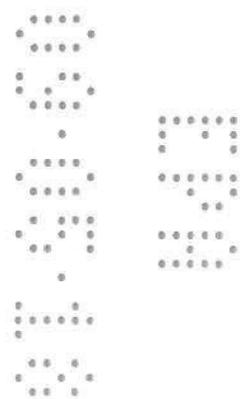

Premium Finishes

Sea Hawk

Sea Hawk Paints

Premium Quality

Antifouling Coating

Antifouling Paint

Copper-Free Antifouling

Metal-free self-polishing ablative antifoulant

Environmentally safe

Compatible over most existing antifoulants

Econea

Lloyd's Register certified

Ideal outdrive antifoulant

The ECONEA Tradename and logo are registered trademarks of Janssen PMP, a division of Janssen Pharmaceutica, NV, Beerse, Belgium

Premium Yacht Finishes

California Compliant

Limited One Year Warranty

Multi Season Protection

Metal-Free

Aluminum Hull Compatible

4705 Black

4702 Bright Blue

4730 Dark Blue

4701 Bright Red


4703 Bright Green

4710 White

4731 Light Grey

**[Optional Graphics]**

# PREMIUM QUALITY

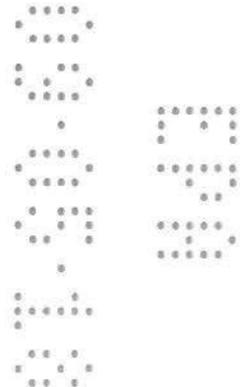

Hand Crafted in <sup>SM</sup>  
*America!*



SMART  
SOLUTION




[ABOVE BAR CODE WILL APPEAR ON EACH CAN AND THE NUMBERS WILL CORRESPOND WITH THE BAR CODE ISSUED FOR THAT PRODUCT.]

Net Contents 1 Gallon  
U.S. Measure  
3.785 Liters



(Manufactured by)  
**NEW NAUTICAL COATINGS, INC.**  
14805 49th Street North  
Clearwater, FL 33762

[Above will be used with contents and manufacturer depending on the size]

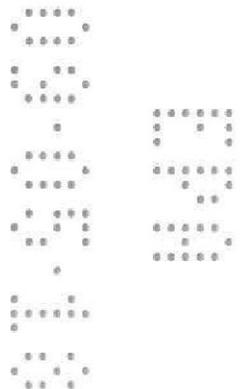

[Net Contents:] (5-gallon pail 18.927 ), (Gallon 3.785 Liters), (Quart 0.9463 Liters)  
(Pint .4732 Liters)

(Batch Code) [to appear on front or back panel of the label or immediate container depending on the container type/size]

**DIRECTIONS FOR USE:** It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**GENERAL DESCRIPTION:** Abrasive, self-polishing antifoulant. This product is designed to control barnacles, algae and other marine fouling in salt or fresh water. This product is designed for use on the surfaces of hulls on ships, boats, barges, yachts, or running gear.

Shake vigorously for several minutes with a mechanical paint shaker before use. Due to the settlement in the product, if this product is not properly shaken it will become ineffective.

**SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION**

#### PRODUCT INFORMATION

**Finish/Sheen:** Semi-Gloss  
**Converter:** One Pack  
**Volume Solids:** 63% ± 2%  
**Mix Ratio:** One Pack  
**Shipping Weight:** 10-11 lbs/gal  
**Flash Point:** 100° F/38° C  
**Film Thickness:** 6 mils wet equals 3.78 dry per coat  
**Recommended Coats:** 3  
**Theoretical Coverage:** 267 sq.ft./gal.

#### APPLICATION DETAILS

**Sweat-In Time:** N/A  
**Thinner:** Sea Hawk 2033, 2035  
**Cleaner:** Sea Hawk Xylene 7130

#### OVERCOATING INTERVALS:

Drying Time (Hrs):

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hrs	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

Consult your Sea Hawk Representative for the system best suited for surfaces to be protected.

#### REGULATORY DATA

VOC: 328 Grams/Liter

**Limitations:** Apply in good weather when air and surface temperature are above 50° F (10°C). Surface temperatures must be at least 5° F (1°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40-100°F (4-38°C). Prolonged atmospheric exposure of the product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating application procedures. See published data sheets for more specific application data. As application, environment and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of coating.

**SURFACE PREPARATION:** Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing (SSPC-SPI).

**Application:** This product can be applied by brush, roller, or spray.

**Thinning:** We do not recommend thinning. If necessary, thin no more than 10% by volume with 2033 or 2035.

**Clean Up:** Clean all equipment immediately after using with Sea Hawk Xylene 7130.

**Safety:** Read and observe all precautionary statements on this Label.

#### STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

**Storage:** Do not store near open heat or flame. Store below 100°F/38°C. Store in well ventilated area.

**Pesticide Disposal:** Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance. **Container Disposal:** Non-refillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER. Corrosive:** Causes irreversible eye damage. Causes skin irritation. May be fatal if swallowed. Harmful if inhaled. Do not get in eyes or on clothing. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid contact with skin, eyes or clothing. Avoid breathing vapor or spray. When handling, wear goggles or face shield, chemically resistant gloves, long sleeved shirt and pants, socks, chemical resistant footwear, and chemically resistant gloves (such as Barrier Laminate, Butyl Rubber, and Nitrile Rubber). When mixing, loading, or cleaning equipment, wear chemical-resistant apron. For overhead exposure wear chemical-resistant headgear. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco. Remove and wash contaminated clothing before reuse.

**ENVIRONMENTAL HAZARDS**

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL AND CHEMICAL HAZARDS**

Combustible. Do not use or store near open flame.

First Aid	
If in eyes:	Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call poison control center or doctor for treatment advice.
If on skin:	Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
If swallowed:	Call a poison control center or doctor immediately for treatment advice. Have a person sip a glass of water if able to swallow. Do not induce vomiting unless told to by a poison control center or doctor. Do not give anything to an unconscious person.
If inhaled:	Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for treatment advice.
Have the product container or label with you when calling a poison control center or doctor or going for treatment.	
For Hazardous Materials [or Dangerous Goods] Incident Spill, Leak, Fire, Exposure, or Accident Call CHEMTREC Day or Night. Within USA and Canada 1-800-424-9300. Outside USA and Canada +1-703-741-5970 CHEMTREC. Account #15570.	
For Non Emergencies call New Nautical Coatings Inc., Within the USA and Canada 1-800-528-0997, Outside USA and Canada +1-727-523-8053.	
<b>NOTE TO PHYSICIAN:</b> May pose an aspiration pneumonia hazard. Contains petroleum distillate.	

EPA Reg. No. 44891-19

EPA Est No.44891-FL-1

